

LEVEL TRANSMITTER Model 517



FEATURES

- Submersible
- Less than 7/8" diameter
- Corrosion resistant construction
- Ranges from 30" WC to 1,200 ft WC/500 PSI (34 bar)
- Intrinsically Safe design available
- All stainless steel construction

TYPICAL APPLICATIONS

- Methane gas wells
- Down hole water wells
- Inground and underground tanks
- Water and sewage treatment plants
- Reservoirs / Dams
- Marine / Shipboard
- Chemical waste ponds

HYDROSTATIC HEAD PRESSURE TO ACCURATELY MEASURE LEVEL

If you choose to measure level through hydrostatic head pressure, then you can't do better than the Model 517 from Viatran. The Model 517 promises an accuracy to 0.1%.

And it's submersible. Meaning you can throw it in the tank and not worry about some of the things that Process Engineers have

to worry about - like the fog rolling in. The Model 517 will send you a reliable 4 to 20 mA output.

WHAT DOES RUGGED REALLY MEAN?

The Model 517 has been engineered to survive in hostile media. We're confident you can depend on the 517. Internal circuitry provides lightning protection, while a 4 to 20 mA output signal minimizes potential outside interference and signal degradation. All of this is critical if the signal needs to travel over long cable lengths (as in groundwater studies).

RUGGED FEATURES

The unique Viatran cable seal ensures watertight integrity up to 500 PSI (34 bar). Other potential leak paths are avoided by Viatran's all-welded sensor design. This design eliminates the O-ring seal.

OPTIONAL 1/4" NPT PRESSURE PORT

A removable end cap comes standard on the Model 517. However, if weight is needed, heavier end caps are available. The optional 1/4" NPT pressure port is ideal for checking unit calibration against a known pressure source.

For more information, contact Viatran.



Viatran
3829 Forest Parkway
Suite 500
Wheatfield, NY 14120

Hotline: 1-800-688-0030
Phone: 1-716-629-3800
Fax: 1-716-693-9162
Email: solutions@viatran.com

PERFORMANCE

Accuracy Combined

Full Scale Pressure Range (FSPR)	0-3, 5, 10, 15, 30, 50, 100, 200, 300, 500 PSI
	0-7, 12, 23, 35, 69, 115, 230, 462, 693, 1154 feet of water column
Linearity, Hysteresis & Repeatability	$\leq \pm 0.1\%$ FSO typical ($\pm 0.25\%$ FSO max)
Hysteresis & Repeatability	$\leq \pm 0.05\%$ FSO
Full Scale Output (FSO)	16 mA
Resolution	Infinite
Zero Balance	4 mA $\pm 0.25\%$ FSO
Long Term Stability	$\leq \pm 0.20\%$ FSO per year
Response time	≤ 1 mSec
Temperature Effect on Zero	$\leq \pm 1.0\%$ 100°F (37°C)
Temperature Effect on Span	$\leq \pm 1.0\%$ 100°F (37°C)
Compensated Temperature Range	32°F to 180°F (0°C to 82°C)
Operating Temperature	-40°F to 185°F (-40°C to 85°C)
Storage Temperature Range	-40°F to 250°F (-40°C to 121°C)

ELECTRICAL

Supply Voltage	9 to 30 Vdc
Power Supply Regulation	$\leq \pm 0.0001\%$ per Volt
Output Signal	4 to 20 mA
Span	$< 0.25\%$ FSO
Circuit Protection	Reverse polarity protected. Over-voltage protected to 1000V < 1 mSec duration
Electrical Connection	3 wire, 22 AWG
Red	+Power/Signal
Black	-Power/Signal
Bare	Case ground

MECHANICAL

Pressure Connection	5/8" - 18 UN female thread with protective end cap installed
Proof Pressure	3 times rated range
Burst Pressure	5 times rated range
Diameter	0.875 inches
Weight	Pressure capsule 10 oz.
Cable Weight	11.3 lbs per 1000 feet (Polyurethane)

MATERIALS OF CONSTRUCTION

Housing	316L stainless steel
Pressure Connection Sensor	316L stainless steel
Cable Options	316L stainless steel
Mounting	Polyurethane, Tefzel
Identification	Laser etched onto body
Cable Strength	Poly Wire - 30 lbs; Support Line - 100 lbs

LEVEL TRANSMITTER Model 517

CERTIFICATIONS (Consult Factory for Available Options)

FM	Intrinsic Safety Class I, II, III, Div. 1, Groups A thru G and AEx ia IIC T4, Indoor and Outdoor NEMA 4X Hazardous Locations
CSA	Intrinsic Safety Class I, Div. 1, Ex ia IIC T4 Type 4 Enclosure


OPTIONS

Codes	
DH.....	Special range
DN.....	Improved accuracy
EA.....	Special calibration run
NH.....	Customer specified identification
NR.....	Alternate protection baffle plate with weight hook (max weight 2 lbs)
TG.....	CSA and FM Intrinsically Safe design

Note: Application of some available options may affect standard performance. Consult your Viatran Representative for details.

ACCESSORIES

Breather tube filler
Panel mount digital display
Pressure test fitting (1/4" NPT (F) screws into end cap threads)
Desiccant tube kit

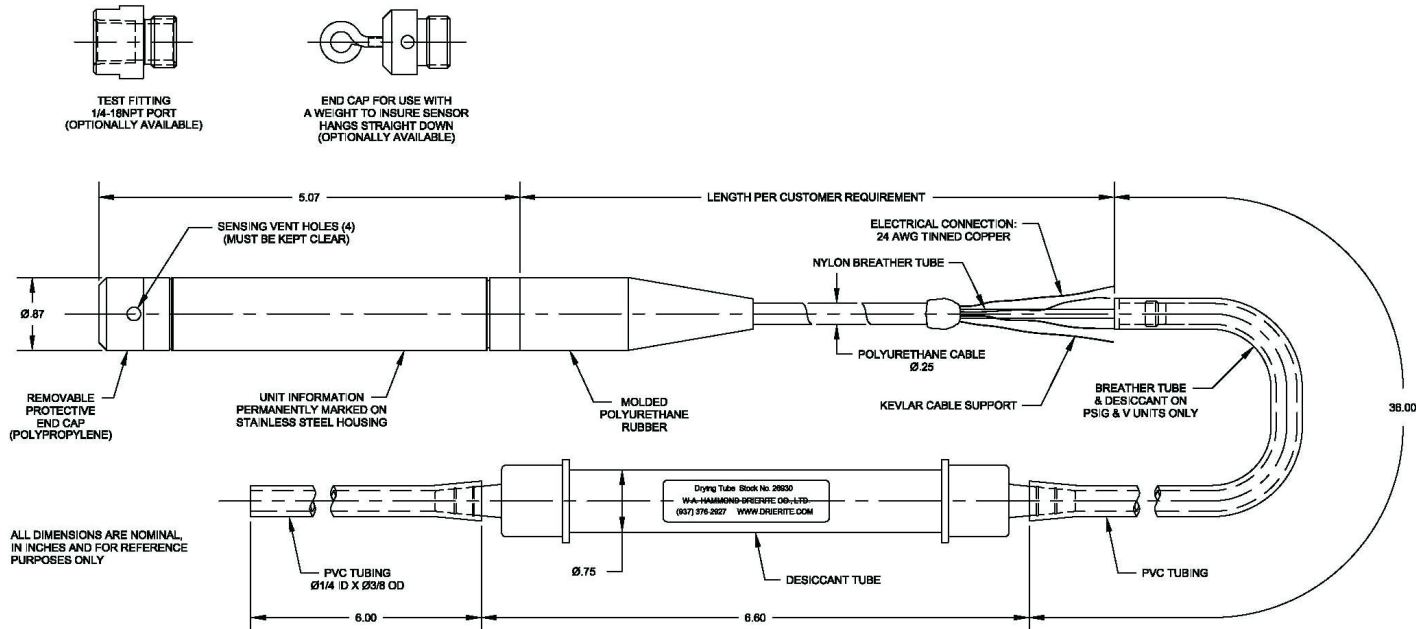

Information is accurate to the best of Viatran's knowledge. We reserve the right to change specifications at any time. Please contact Viatran for specific order inquiries.